


TAIZHOU SAIFI TECHNOLOGY CO.,LTD.

Professional Polyester (PET) Strapping Manufacturer & Exporter

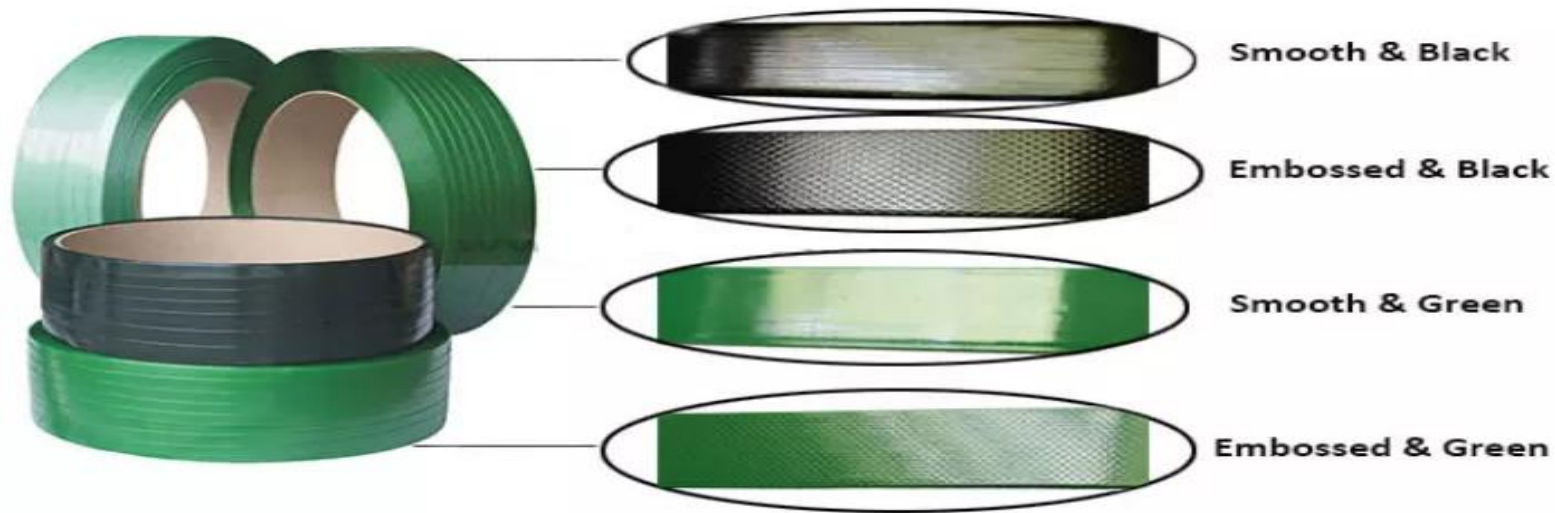

TAIZHOU SAIFI TECHNOLOGY CO.,LTD.

Tel: +86-523-88391891 Mobile: +86-15195987680

Email : info@saifitech.com ; saifitech@outlook.com

Address: NO.1001 South West Road,Jiangyan,Taizhou,Jiangsu,P.R.China 225500

PET STRAPS

These straps are available in 9-25mm widths in high and medium-strength grades.

PET strap is made from 100 per cent fresh material. Slight color variations are inevitable and do therefore not pose a quality criterion. The straps are temperature-stable and guarantee high strength and elasticity for optimally securing loads.

All straps are suitable for use with machines and manual strapping equipment.

The PET straps are used in an extremely diverse range of industries. They are used for strapping stacks of paper and corrugated board and also for entire pallets with more solid loads, including bricks, wood or cans. It is irrelevant whether the strap is sealed using the heat-welding or ultrasonic method. The PET strap is suitable for both processes.



- Delivery quantities from one box to a complete truck or container load
- Individual customer care by our own field service in China
- Also obtainable from specialist packaging materials dealers

POLYESTER STRAP – AUTOMATIC MACHINE GRADE

Article No.	Specification	Width		Thickness		Weight (Kg)	Average Length		Average Break Strength	
		(mm)	(inch)	(mm)	(inch)		(meter)	(feet)	(Newton)	(Kg)
SF0906	9mm*0.6mm	9	3/8	0.6	0.02	20	2900	9500	1800	185
SF1205	12mm*0.5mm	12	1/2	0.5	0.02	20	2500	8200	2000	205
SF1206	12mm*0.6mm	12	1/2	0.6	0.02	20	2100	6900	2400	245
SF12506	12.5mm*0.6mm	12.5	1/2	0.6	0.02	20	2000	6500	3050	310
SF13065	13mm*0.65mm	13	1/2	0.65	0.026	20	1800	5900	3450	350
SF1606	16mm*0.6mm	16	5/8	0.6	0.024	20	1600	5200	3600	370
SF1607	16mm*0.7mm	16	5/8	0.7	0.027	20	1400	4600	4300	440
SF1608	16mm*0.8mm	16	5/8	0.8	0.03	20	1200	4000	4500	460
SF1609	16mm*0.9mm	16	5/8	0.9	0.035	20	1100	3600	5600	570
SF1610	16mm*1.0mm	16	5/8	1	0.4	20	1000	3200	6000	610
SF1908	19mm*0.8mm	19	3/4	0.8	0.03	20	1000	3200	6000	610
SF1910	19mm*1.0mm	19	3/4	1	0.04	20	800	2600	7000	710
SF2510	25mm*1.0mm	25	1	1	0.04	20	600	2000	10000	1020
SF2512	25mm*1.2mm	25	1	1.2	0.047	20	500	1600	12000	1220

***The listed technical values are guiding values, achieved in our laboratory.

For reference only & our products are subject to change without prior notice.


High strength straps can be customized subject to customers requirements.

Standard color green; other colors and sizes available on request.

Packing units

Core Ø: 200mm X 152mm or 406mm X 152mm

Pallet size: 114cm X 114cm

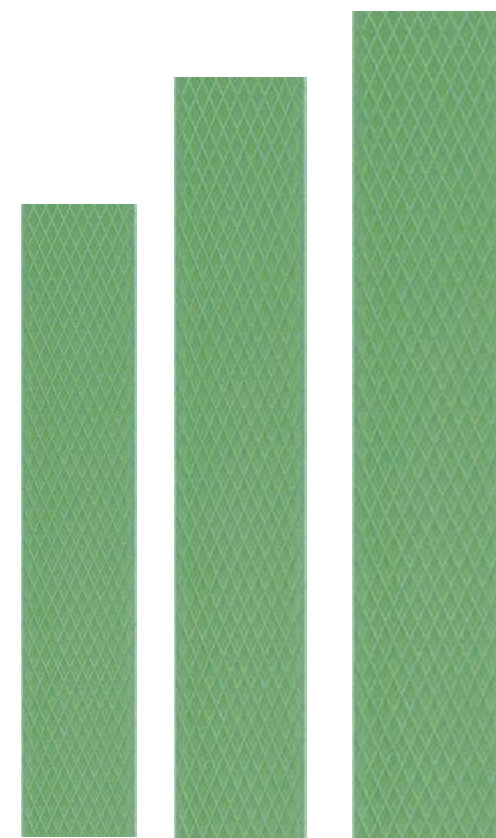

9.0mm

12mm

16.0mm

APPLICATION FIELD



WE PACK FUTURE



PACKING & SHIPPING

Container: 40'HQ

Pallet: No.20

Roll of Each Pallet: 60rolls

Net Weight of Each Coil: 20kg

Total Weight: 24000kg

Container: 20'GP

Pallet: NO.10

Roll of Each Pallet: 56rolls

Net Weight of Each Coil: 20kg

Total Weight: 11200kg

(above for your reference, subject to actual situation)

